ytmpipe


PRODUCT DATA SHEET

CARBON STEEL · SEAMLESS FITTINGS · 11

Pipe Caps

Seamless domed butt-weld end caps that seal the end of a pipe run or nozzle — to ASME B16.9 & EN 10253-2 / DIN 2617.

END CAP | DOMED | BW

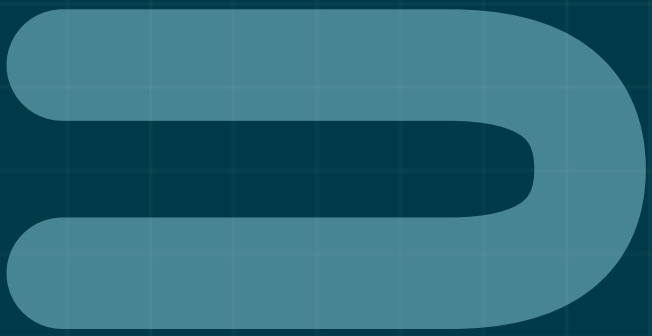

½″–24″ NPS/DN15–600	Domed seal end	SCH 10–XXS match pipe	A234 WPB + WPL6 LT
SIZE RANGE	FORM	SCHEDULE	CORE GRADE

Pipe Caps

— 01 / SPECIFICATION

SEAMLESS CONSTRUCTION

Butt-Weld Range SMLS

Size range	NPS ½"–24" · DN15–600
Form	Domed / dished end cap
Schedule	SCH 10 – XXS (match pipe)
Ends	Butt-weld, bevel 30°

Manufacture & Standards INFO

Process	Cold forming, seamless
Standards	ASME B16.9
European	EN 10253-2 · DIN 2617
Note	Large-Ø fabricated caps: see Welded Fittings

APPLICATIONS

- Sealing pipeline ends & dead legs
- Pressure-vessel & header ends
- Oil, gas & petrochemical
- Water & utility networks
- Future tie-in points



Pipe Caps — schematic (not to scale)

MATERIAL GRADES

Standard	Grades
ASME B16.9 / A234	WPA · WPB
EN 10253-2	P235 · P265 · S235 · S265
DIN 2617	St35.8 · St37 · St44

HOW TO ORDER

1 · Product	Butt-weld cap
2 · Size	e.g. 6"
3 · Schedule	e.g. SCH 40
4 · Grade	ASTM A234 WPB
5 · End	bevel 30°
6 · Cert	EN 10204 3.1

CAP · 6" · SCH 40
ASME B16.9
ASTM A234 WPB
Butt-weld bevel 30°
MTC EN 10204 3.1

STANDARDS & SURFACE

ASME B16.9 | EN 10253-2 | ASTM A234 WPA/WPB | DIN 2617 | EN ISO 6761 | EN 10204 3.1 | ISO 9001:2015

Surface: oil / galvanized / sandblasted / bare